



INSTRUCTION SHEET

Can-Am Off-road

AUGUST 17, 2026
487804553 | VERSION A

Can-Am Winch Accessory Kit

TIME FOR COMPLETION: 0.00 HOUR

The following symbols may be used in this document:

DANGER

Indicates a hazardous situation that, if not avoided, will result in death or serious injury.

WARNING

Indicates a hazardous situation that, if not avoided, could result in death or serious injury.

CAUTION

Indicates a hazardous situation that, if not avoided, could result in minor or moderate injury.

NOTICE

Indicates an instruction which, if not followed, could severely damage vehicle components or other property.

**! WARNING**

- This kit is designed for specific applicable models only (authorized BRP dealers will confirm model(s)). It is not recommended for units other than the one (those) for which it was sold.
- If the installation of the kit requires a template, ensure template is to scale.
- Should removal of a locking device (e.g. lock tabs, self-locking fasteners, etc.) be required when undergoing disassembly/assembly, always replace with a new one.
- Torque wrench tightening specifications must strictly be adhered to.
- Always wear EYE PROTECTION AND APPROPRIATE GLOVES when using power tools.
- Always be aware of parts that can move, such as wheels, transmission components, etc.
- Some components may be HOT. Always wait for all components to cool down before performing work.
- Unless otherwise specified, engine must be OFF when performing any operation on the vehicle.

! WARNING

Some important safety information and/or operating instructions dedicated to the end user might be included in this instruction sheet. Make sure to give the kit part number as well as the instruction sheet included with this kit to the customer. Verify that the customer has access to all the information required for proper use of the accessory.

✎ NOTE

USE TIGHTENING TORQUES IN THE FOLLOWING TABLE IF NOT OTHERWISE SPECIFIED.

–	GRADE			
–	5.8	8.8	10.9	12.9
M4	1.8 N•m ± 0.2 N•m	2.8 N•m ± 0.2 N•m	3.8 N•m ± 0.2 N•m	4.5 N•m ± 0.5 N•m
	(16 lbf•in ± 2 lbf•in)	(25 lbf•in ± 2 lbf•in)	(34 lbf•in ± 2 lbf•in)	(40 lbf•in ± 4 lbf•in)
M5	3.3 N•m ± 0.2 N•m	5 N•m ± 0.5 N•m	7.8 N•m ± 0.7 N•m	9 N•m ± 1 N•m
	(29 lbf•in ± 2 lbf•in)	(44 lbf•in ± 4 lbf•in)	(69 lbf•in ± 6 lbf•in)	(80 lbf•in ± 9 lbf•in)
M6	7.5 N•m ± 1 N•m	10 N•m ± 2 N•m	12.8 N•m ± 2.2 N•m	16 N•m ± 2 N•m
	(66 lbf•in ± 9 lbf•in)	(89 lbf•in ± 18 lbf•in)	(113 lbf•in ± 19 lbf•in)	(142 lbf•in ± 18 lbf•in)
M8	15.3 N•m ± 1.7 N•m	24.5 N•m ± 3.5 N•m	31.5 N•m ± 3.5 N•m	40 N•m ± 5 N•m
	(135 lbf•in ± 15 lbf•in)	(18 lbf•ft ± 3 lbf•ft)	(23 lbf•ft ± 3 lbf•ft)	(30 lbf•ft ± 4 lbf•ft)
M10	29 N•m ± 3 N•m	48 N•m ± 6 N•m	61 N•m ± 9 N•m	73 N•m ± 7 N•m




	(21 lbf•ft ± 2 lbf•ft)	(35 lbf•ft ± 4 lbf•ft)	(45 lbf•ft ± 7 lbf•ft)	(54 lbf•ft ± 5 lbf•ft)
M12	52 N•m ± 6 N•m	85 N•m ± 10 N•m	105 N•m ± 15 N•m	128 N•m ± 17 N•m
	(38 lbf•ft ± 4 lbf•ft)	(63 lbf•ft ± 7 lbf•ft)	(77 lbf•ft ± 11 lbf•ft)	(94 lbf•ft ± 13 lbf•ft)
M14	85 N•m ± 10 N•m	135 N•m ± 15 N•m	170 N•m ± 20 N•m	200 N•m ± 25 N•m
	(63 lbf•ft ± 7 lbf•ft)	(100 lbf•ft ± 11 lbf•ft)	(125 lbf•ft ± 15 lbf•ft)	(148 lbf•ft ± 18 lbf•ft)
M16	126 N•m ± 14 N•m	205 N•m ± 25 N•m	255 N•m ± 30 N•m	305 N•m ± 35 N•m
	(93 lbf•ft ± 10 lbf•ft)	(151 lbf•ft ± 18 lbf•ft)	(188 lbf•ft ± 22 lbf•ft)	(225 lbf•ft ± 26 lbf•ft)
M18	170 N•m ± 20 N•m	273 N•m ± 32 N•m	330 N•m ± 25 N•m	413 N•m ± 47 N•m
	(125 lbf•ft ± 15 lbf•ft)	(201 lbf•ft ± 24 lbf•ft)	(243 lbf•ft ± 18 lbf•ft)	(305 lbf•ft ± 35 lbf•ft)

NOTE

The illustrations in this document show typical construction of the different assemblies and may not reproduce the full detail or exact shape of the parts; however, they represent parts that have the same or similar function. In the pictures below, parts may have been removed for clarity purposes.

PARTS TO BE INSTALLED

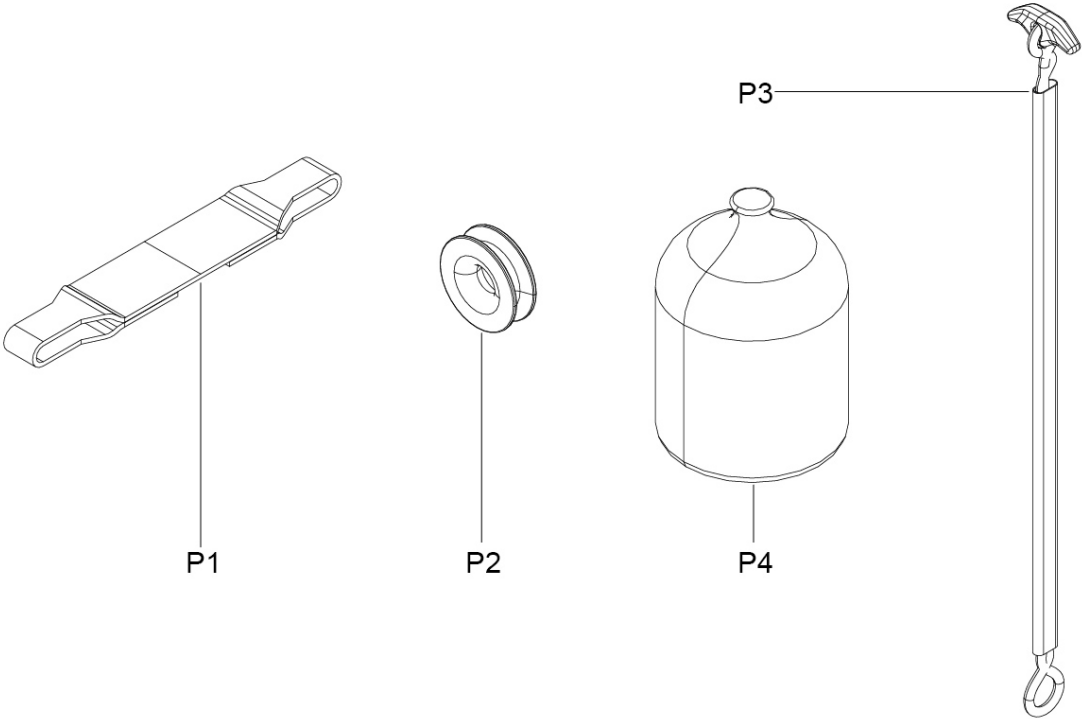



ITEM	DESCRIPTION	PART NUMBER	QTY
P1	Tree Saver Strap	Not Available Separately	1
P1a	Warning Label	704911136 (Not Shown)	1
P2	Recovery Ring	715010836	1
P3	Soft Shackle	715010577	1
P4	Storage Rope Bag	Not Available Separately	1

SERVICE PARTS

715010577 KIT

ITEM	DESCRIPTION	PART NUMBER	QTY
P3	Soft Shackle	715010577	1
P3a	Warning Label	704911137 (Not Shown)	1

UTILIZATION INSTRUCTIONS

SAFE USAGE

WARNING

The off-road recovery equipment stores and releases enormous quantities of energy. A wrong usage may cause serious injuries or death.

NOTICE

- A used, surcharged, misused or poorly maintained piece of the recovery equipment will break.
- The user is responsible to determine if the equipment suits the situation and is responsible to respect the working load limit (WLL) of each piece of equipment.
- The user has to acquire the required knowledge to be able to safely do the manoeuvres.

 **WARNING**

Essential rules for the proper usage of the kinetic recovery rope

- ALWAYS inspect equipment prior to each utilization.
- NEVER use a damaged equipment, a rope which is frayed, cut or worn out.
- NEVER allow bystanders in the work zone or in the whipping zone.
- ALWAYS use the lanyard to operate the hook and the cable.
- NEVER step over a fixed cable.
- NEVER do a winch manoeuvre with a angle.
- NEVER apply lateral loads on anchor points.
- NEVER do a jerky traction movement on the winch cable.
- NEVER wrap the cable directly around a tree, ALWAYS use a tree saver strap around the tree base.
- NEVER put a synthetic rope on sharp or angular rocks.
- ALWAYS use an equipment for which the maximum load is at least equal to the maximum load of the winch.
- ALWAYS install a recovery damper on the cable before pulling.
- ALWAYS refer to the *User Guide* before using the winch.
- ALWAYS wear all the required personal safety equipment.

SOFT SHACKLE

1. Inspect the equipment.
2. Pass the soft shackle [P3] through the anchor point.



ONE TIME THROUGH THE ANCHOR POINT

 NOTE

You may pass the soft shackle [P3] through the anchoring point two times to increase by 50% the soft shackle rated strength.



TWO TIMES THROUGH THE ANCHOR POINT

3. Align the retaining hook with the rope to pass the retaining hook in the soft shackle's loop.



4. Place the retaining hook perpendicular to the rescue rope and lock it against the loop.

WARNING

Ensure that the retaining hook is properly locked by pulling on the rope to fully seat it against the loop.



5. Ensure that the soft shackle [P3] is not twisted or squeezed.

TREE SAVER STRAP AND RECOVERY RING

WARNING

Stop the vehicles, shift into Park (P) and always use the parking brakes before handling the equipment.

ONE LINE CONFIGURATION

ITEM	CONFIGURATION
Tree Saver Strap [P1]	Basket
Recovery Ring [P2]	No
Soft Shackle [P3]	One or Two Times Through the Anchor Point
Winch Cable	One Line

- 1. Inspect the equipment.
- 2. Identify a tree that is strong enough for the operation and close enough to maintain at least 4-5 wraps of cable on the winch drum.
- 3. Install the tree saver strap [P1] to the tree base.



4. Pull the winch cable and fix it to the tree saver strap [P1] using a soft shackle [P3].



1. Winch Cable
 2. Soft Shackle [P3]
 3. Tree Saver Strap [P1]
5. Install a recovery damper at the middle of the winch cable, as a weighted bag or a jacket, to bring down the cable in case of a breakage.
 6. Ensure there are no bystanders in the work zone and in the whipping zone. Consider minimally the length of the cable.



7. Do the traction manoeuver safely.

REDIRECTED LINE CONFIGURATION

ITEM	CONFIGURATION
Tree Saver Strap [P1]	Basket
Recovery Ring [P2]	Yes
Soft Shackle [P3]	One or Two Times Through the Anchor Point
Winch Cable	Redirected Line

 **NOTE**

It may be necessary to redirect the winch cable when the space does not allow to pull in line with the vehicle. The use of the recovery ring [P2] as a pulley allow to change the cable direction so the towed vehicle or the towed object can be in line with the cable.

- 1. Inspect the equipment.
- 2. Identify a tree that is strong enough for the operation and close enough to maintain at least 4-5 wraps of cable on the winch drum.
- 3. Install the tree saver strap [P1] to the tree base.



- 4. Install the recovery ring [P2] to the tree saver strap [P1] using a soft shackle [P3]. Pass the soft shackle [P3] through the recovery ring [P2] center.



1. Tree Saver Strap [P1]


2. Recovery Ring [P2]

3. Soft Shackle [P3]

5. Pull the winch cable and pass it around the recovery ring [P2] and then fix it on a anchor point on the towed vehicle or on the towed object.

NOTE

Refer to the *Operator's Guide* of the vehicle to identify the homologated anchor points.

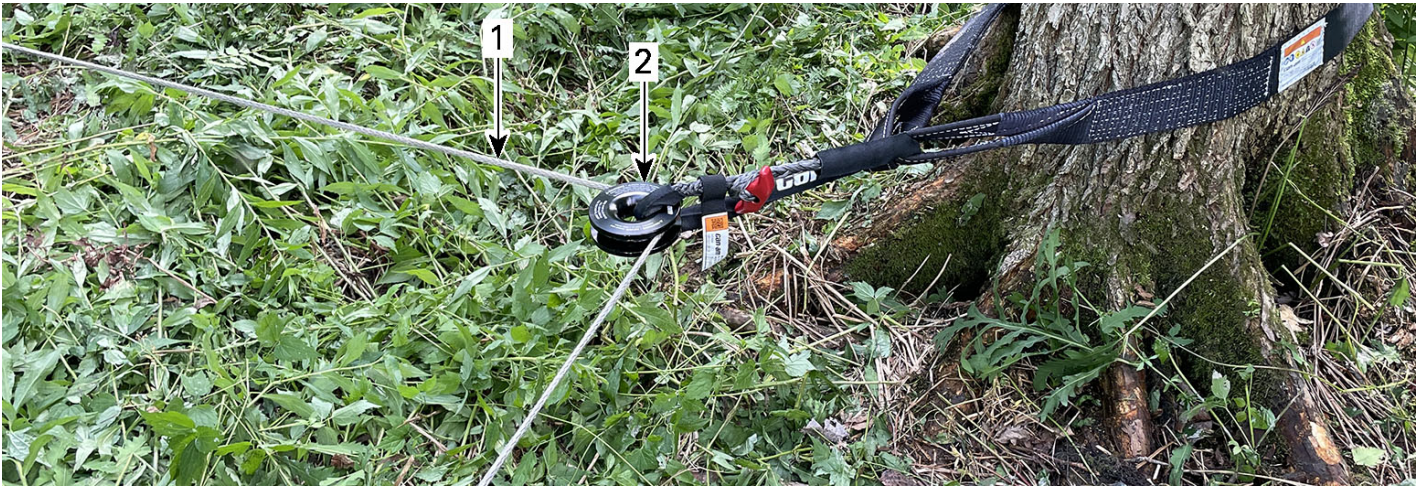

1. Winch Cable

2. Recovery Ring [P2]

6. Install a recovery damper at the middle of the line section having the hook, as a weighted bag or a jacket, to bring down the cable in case of a breakage.
7. Ensure there are no bystanders in the work zone and in the whipping zone. Consider minimally the length of the cable.
8. Do the traction manoeuvre safely.

SAFETY LABEL


This product comes with the following Warning labels containing important safety information.

The label should be considered a permanent part of this product. If the labels comes off or become hard to read, please contact an authorized dealer for FREE OF CHARGE replacement.


Any person who intends to use this product should read and understand the information contained on the label before doing so.

WARNING

- ALWAYS refer to the instruction before use.
- ALWAYS inspect before each use.
- ALWAYS stay away from load.
- NEVER attach on sharp edges.
- NEVER exceed rated capacities.
- NEVER use as a lifting device.

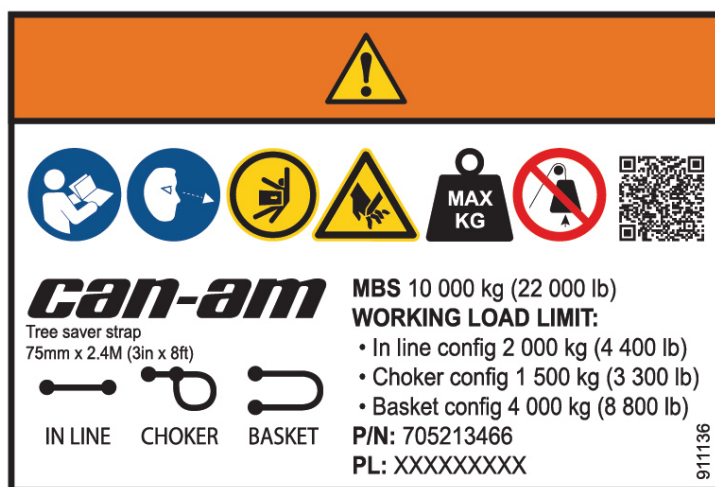


WARNING LABEL (704911136)

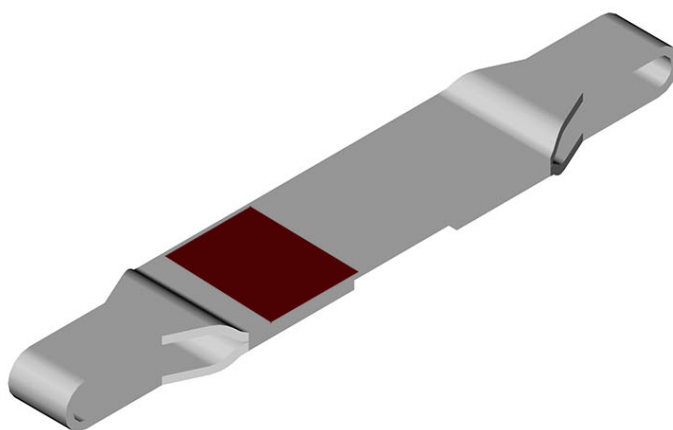


WARNING LABEL (704911136) LOCATION

! WARNING

- ALWAYS refer to the instruction before use.
- ALWAYS inspect before each use.
- ALWAYS stay away from load.
- NEVER attach on sharp edges.
- NEVER exceed rated capacities.
- NEVER use as a lifting device.

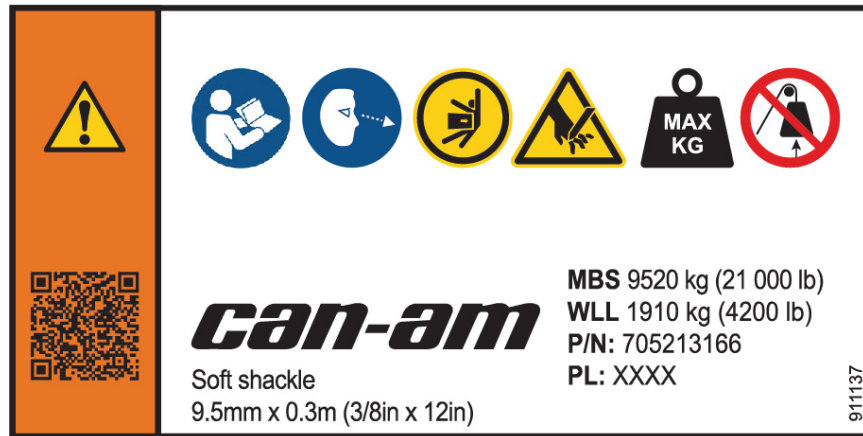


WARNING LABEL (704911137)




WARNING LABEL (704911137) LOCATION

! WARNING

- ALWAYS refer to the instruction before use.
- ALWAYS inspect before each use.
- ALWAYS stay away from load.
- ALWAYS use with a soft shackle.
- ALWAYS use a synthetic winch line less than 1/2 in diameter.
- NEVER exceed rated capacities.
- NEVER use as a lifting device.

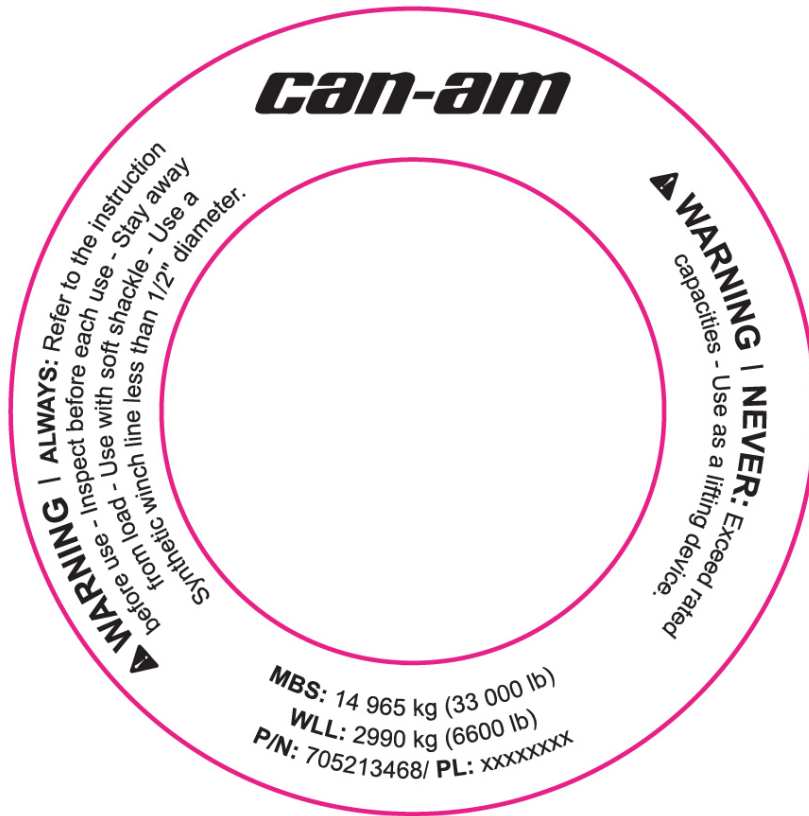

WARNING LABEL (705213468)

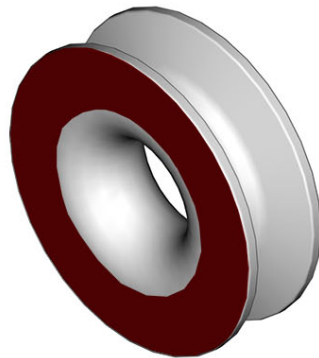

WARNING LABEL (705213468) LOCATION