SKI-DOO KIT LinQ Deep Snow Expandable Bag

Instruction Sheet

Ski-Doo

May 27, 2025
Revision A

487804328

Time for Completion: 0.10 HOUR

LinQ Deep Snow Expandable Bag

The following symbols may be used in this document:

DANGER

Indicates a hazardous situation that, if not avoided, will result in death or serious injury.

WARNING

Indicates a hazardous situation that, if not avoided, could result in death or serious injury.

CAUTION

Indicates a hazardous situation that, if not avoided, could result in minor or moderate injury.

NOTICE

Indicates an instruction which, if not followed, could severely damage vehicle components or other property.

WARNING

- **This kit is designed for specific applicable models only (authorized BRP dealers will confirm model(s)). It is not recommended for units other than the one (those) for which it was sold.**
- **If the installation of the kit requires a template, ensure template is to scale.**
- **Should removal of a locking device (e.g. lock tabs, self-locking fasteners, etc.) be required when undergoing disassembly/ assembly, always replace with a new one.**
- **Torque wrench tightening specifications must strictly be adhered to.**
- **Always wear EYE PROTECTION AND APPROPRIATE GLOVES when using power tools.**
- **Always be aware of parts that can move, such as wheels, transmission components, etc.**
- **Some components may be HOT. Always wait for all components to cool down before performing work.**
- **Unless otherwise specified, engine must be OFF when performing any operation on the vehicle.**

WARNING

Some important safety information and/or operating instructions dedicated to the end user might be included in this instruction sheet. Make sure to give the kit part number as well as the instruction sheet included with this kit to the customer. Verify that the customer has access to all the information required for proper use of the accessory.

NOTE

USE TIGHTENING TORQUES IN THE FOLLOWING TABLE IF NOT OTHERWISE SPECIFIED.


–	GRADE			
–	5.8	8.8	10.9	12.9
M4	1.8 N•m ± 0.2 N•m	2.8 N•m ± 0.2 N•m	3.8 N•m ± 0.2 N•m	4.5 N•m ± 0.5 N•m
	(16 lbf•in ± 2 lbf•in)	(25 lbf•in ± 2 lbf•in)	(34 lbf•in ± 2 lbf•in)	(40 lbf•in ± 4 lbf•in)
M5	3.3 N•m ± 0.2 N•m	5 N•m ± 0.5 N•m	7.8 N•m ± 0.7 N•m	9 N•m ± 1 N•m
	(29 lbf•in ± 2 lbf•in)	(44 lbf•in ± 4 lbf•in)	(69 lbf•in ± 6 lbf•in)	(80 lbf•in ± 9 lbf•in)
M6	7.5 N•m ± 1 N•m	10 N•m ± 2 N•m	12.8 N•m ± 2.2 N•m	16 N•m ± 2 N•m
	(66 lbf•in ± 9 lbf•in)	(89 lbf•in ± 18 lbf•in)	(113 lbf•in ± 19 lbf•in)	(142 lbf•in ± 18 lbf•in)
M8	15.3 N•m ± 1.7 N•m	24.5 N•m ± 3.5 N•m	31 .5 N•m ± 3.5 N•m	40 N•m ± 5 N•m
	(135 lbf•in ± 15 lbf•in)	(18 lbf•ft ± 3 lbf•ft)	(23 lbf•ft ± 3 lbf•ft)	(30 lbf•ft ± 4 lbf•ft)
M10	29 N•m ± 3 N•m	48 N•m ± 6 N•m	61 N•m ± 9 N•m	73 N•m ± 7 N•m
	(21 lbf•ft ± 2 lbf•ft)	(35 lbf•ft ± 4 lbf•ft)	(45 lbf•ft ± 7 lbf•ft)	(54 lbf•ft ± 5 lbf•ft)
M12	52 N•m ± 6 N•m	85 N•m ± 10 N•m	105 N•m ± 15 N•m	128 N•m ± 17 N•m
	(38 lbf•ft ± 4 lbf•ft)	(63 lbf•ft ± 7 lbf•ft)	(77 lbf•ft ± 11 lbf•ft)	(94 lbf•ft ± 13 lbf•ft)
M14	85 N•m ± 10 N•m	135 N•m ± 15 N•m	170 N•m ± 20 N•m	200 N•m ± 25 N•m
	(63 lbf•ft ± 7 lbf•ft)	(100 lbf•ft ± 11 lbf•ft)	(125 lbf•ft ± 15 lbf•ft)	(148 lbf•ft ± 18 lbf•ft)
M16	126 N•m ± 14 N•m	205 N•m ± 25 N•m	255 N•m ± 30 N•m	305 N•m ± 35 N•m
	(93 lbf•ft ± 10 lbf•ft)	(151 lbf•ft ± 18 lbf•ft)	(188 lbf•ft ± 22 lbf•ft)	(225 lbf•ft ± 26 lbf•ft)
M18	170 N•m ± 20 N•m	273 N•m ± 32 N•m	330 N•m ± 25 N•m	413 N•m ± 47 N•m
	(125 lbf•ft ± 15 lbf•ft)	(201 lbf•ft ± 24 lbf•ft)	(243 lbf•ft ± 18 lbf•ft)	(305 lbf•ft ± 35 lbf•ft)



NOTE


The illustrations in this document show typical construction of the different assemblies and may not reproduce the full detail or exact shape of the parts; however, they represent parts that have the same or similar function. In the pictures below, parts may have been removed for clarity purposes.

PARTS TO BE INSTALLED

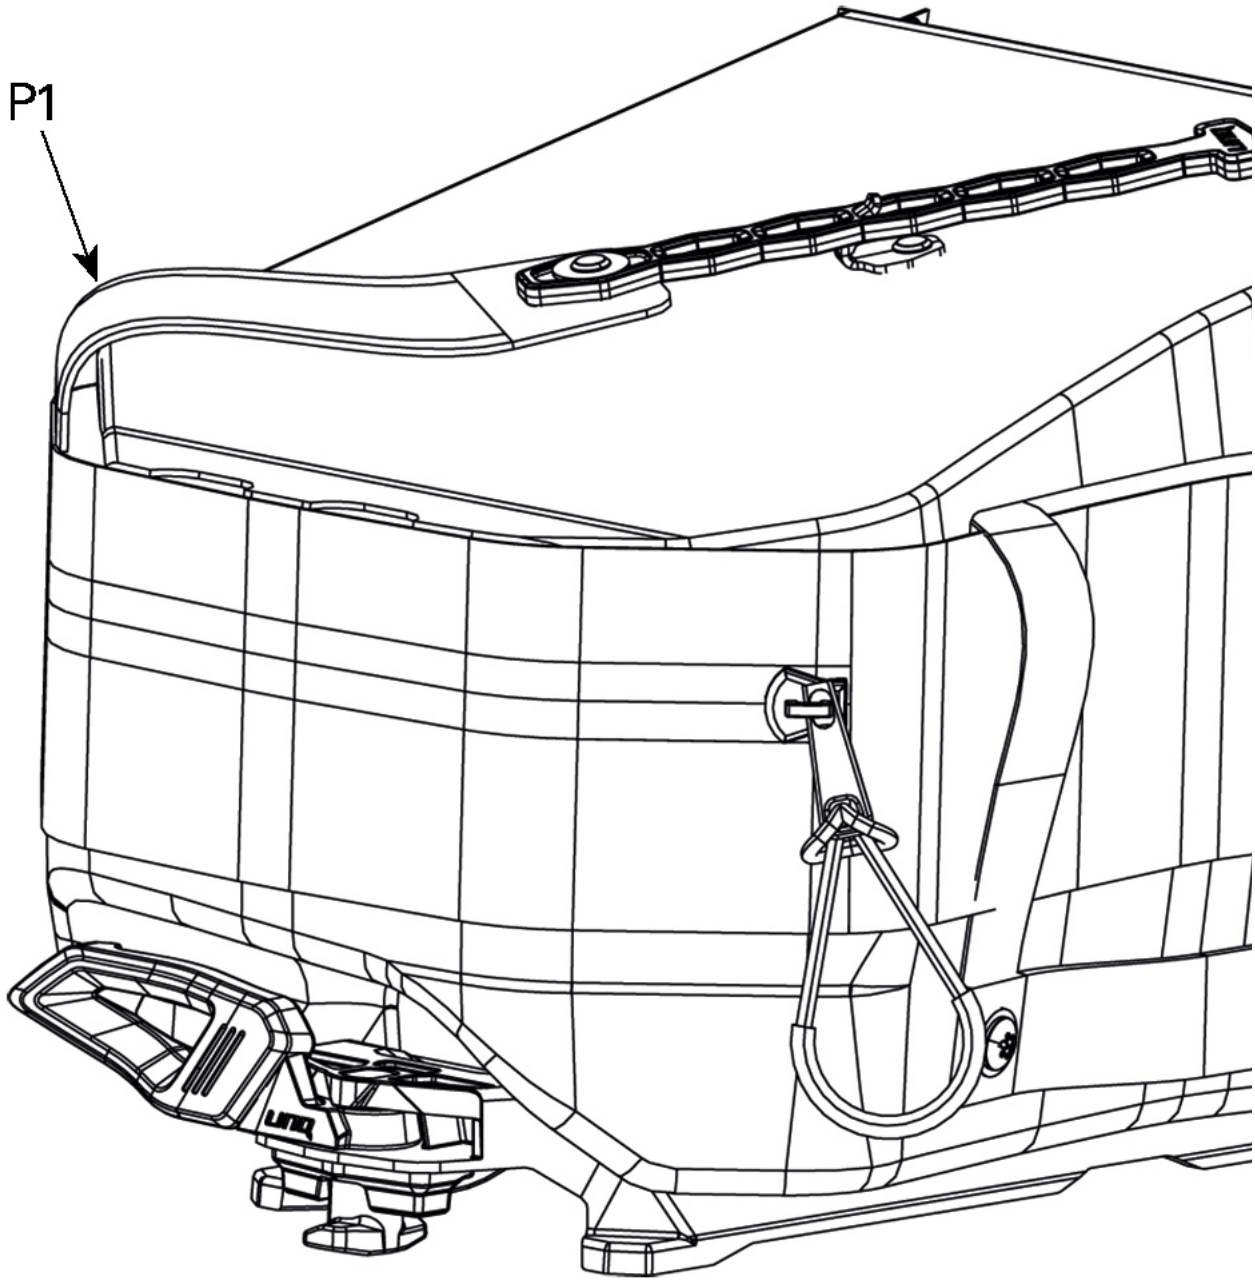

ITEM	DESCRIPTION	PART NUMBER	QTY
P1	Storage bag assembly	Not available separately	1

SERVICE PARTS

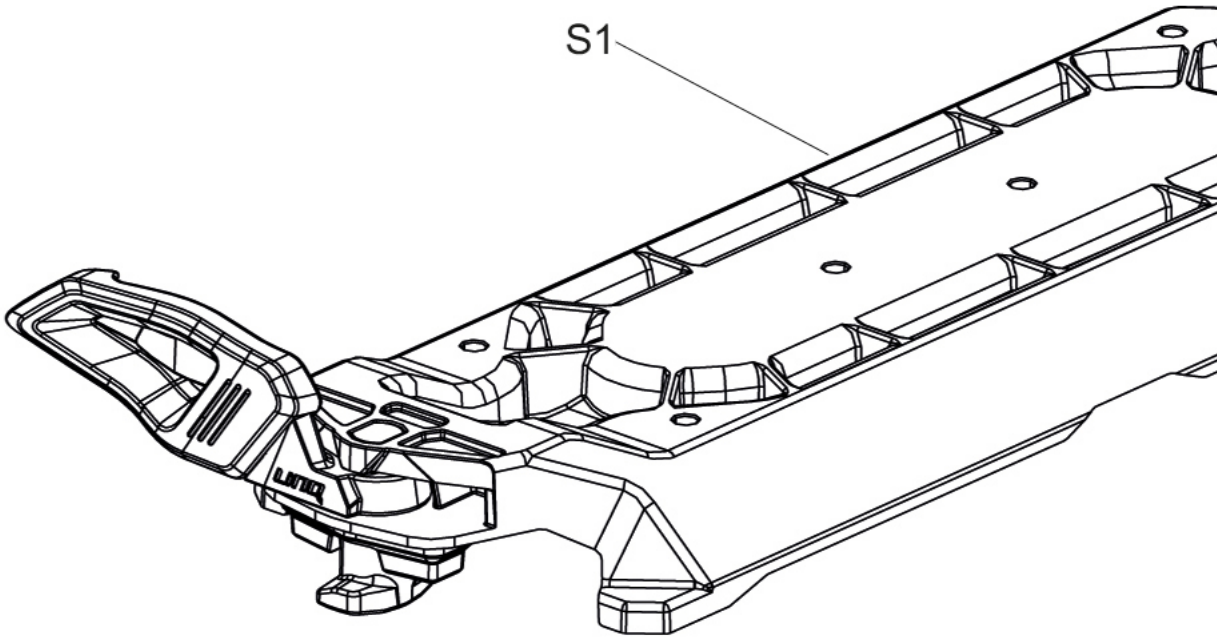


ITEM	DESCRIPTION	PART NUMBER	QTY
S1	Base bag assembly	860203062	1

INSTALLATION INSTRUCTIONS


About this task

LinQ anchor 860202482 (20-24 in) & 860201806 (16 in) available separately.

1. Slide the tow-in in the LinQ anchor.

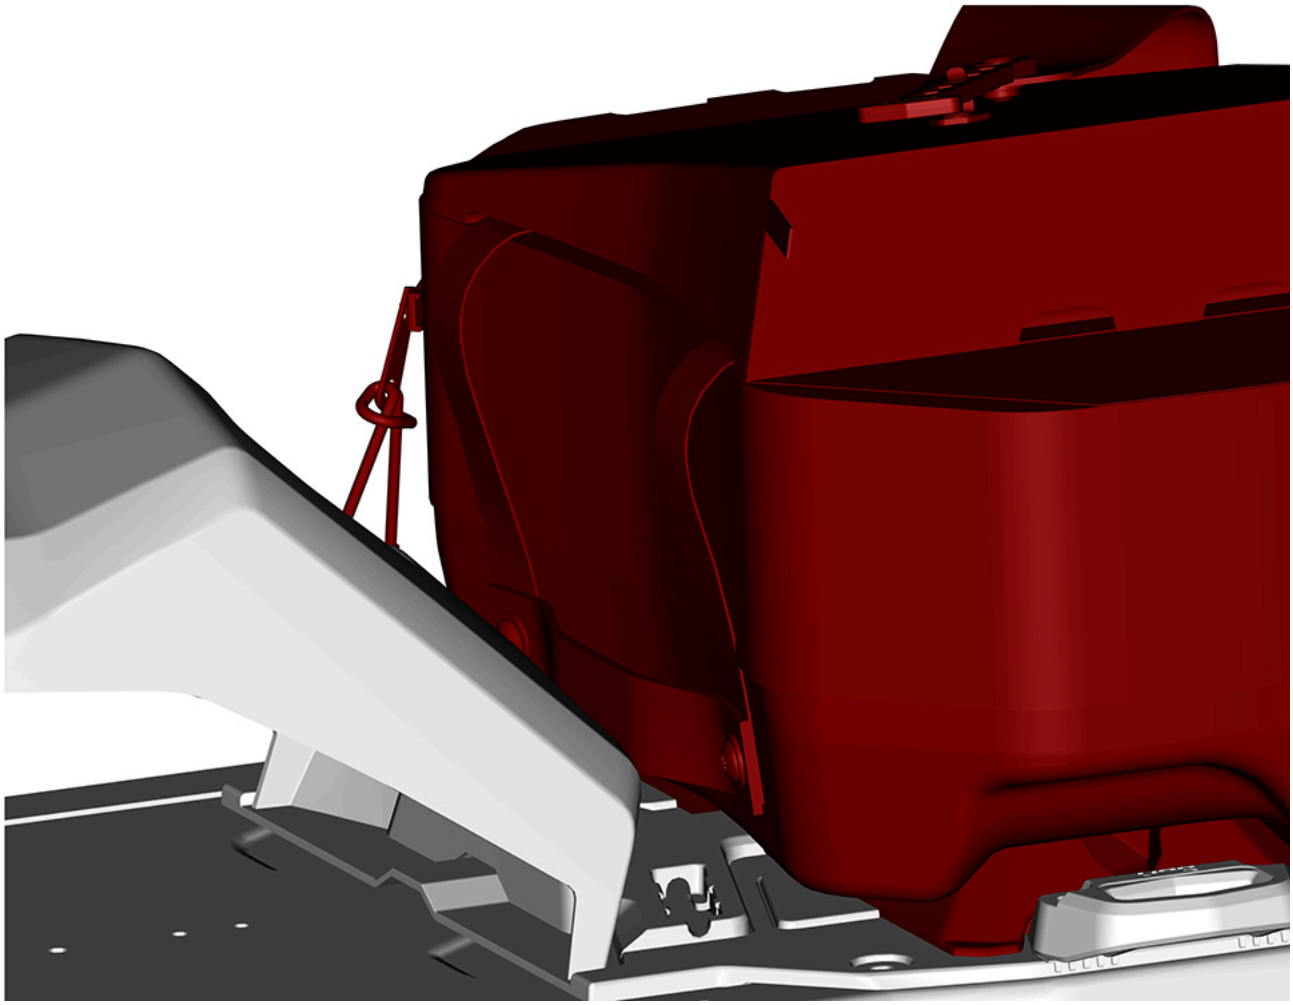

2. Close the LinQ lever and put up the rubber lever-lock onto the hook as shown.

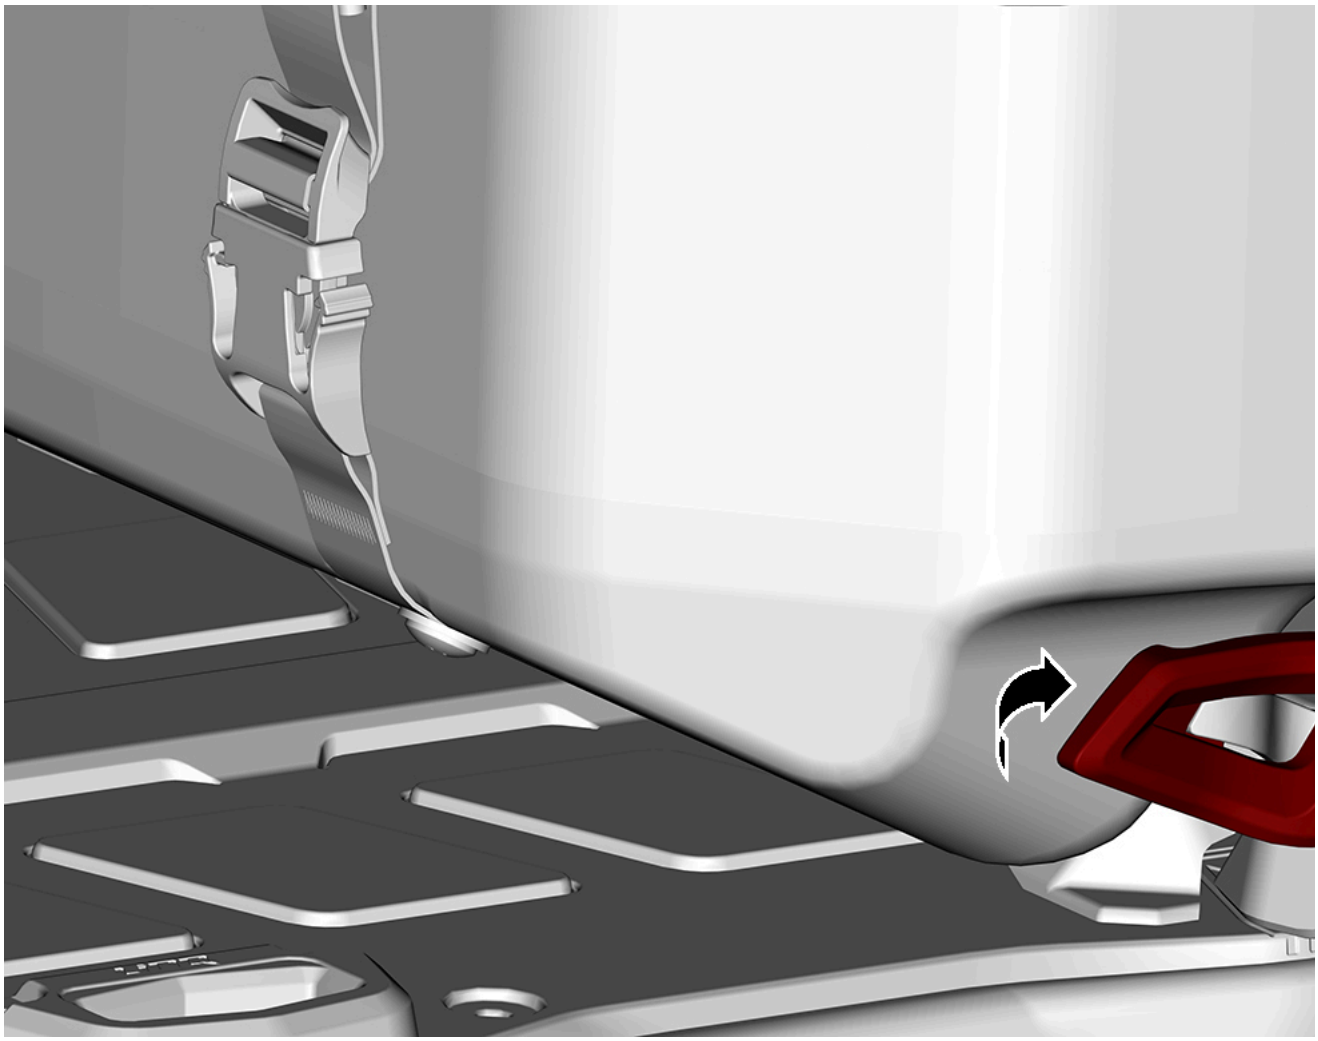

PROPER USAGE INSTRUCTIONS

1. Detach the buckles and slide the zipper to open the bag.



2. 2 pockets under the lid of the bag, are available for storing items.



3. A pocket on the lid is provided for a shovel and a folding saw.





4. The shovel handle should be stored in the fabric strap on the side of the bag and secured by the rubber strap.



1. Fabric strap
2. Rubber strap

5. The straps can be used to hold the removable snowflap.



1. Straps
2. Removable snowflap

SAFETY LABEL


This product comes with the following safety information.

The labels are considered a permanent part of this product. If the labels come off or become hard to read, please contact an authorized dealer for a free of charge replacement.

Any person who intends to use this product should read and understand the information contained on the labels before doing so.

CAUTION

MAXIMUM LOAD: 10 lb (4.5 kg) evenly distributed and immobilized.

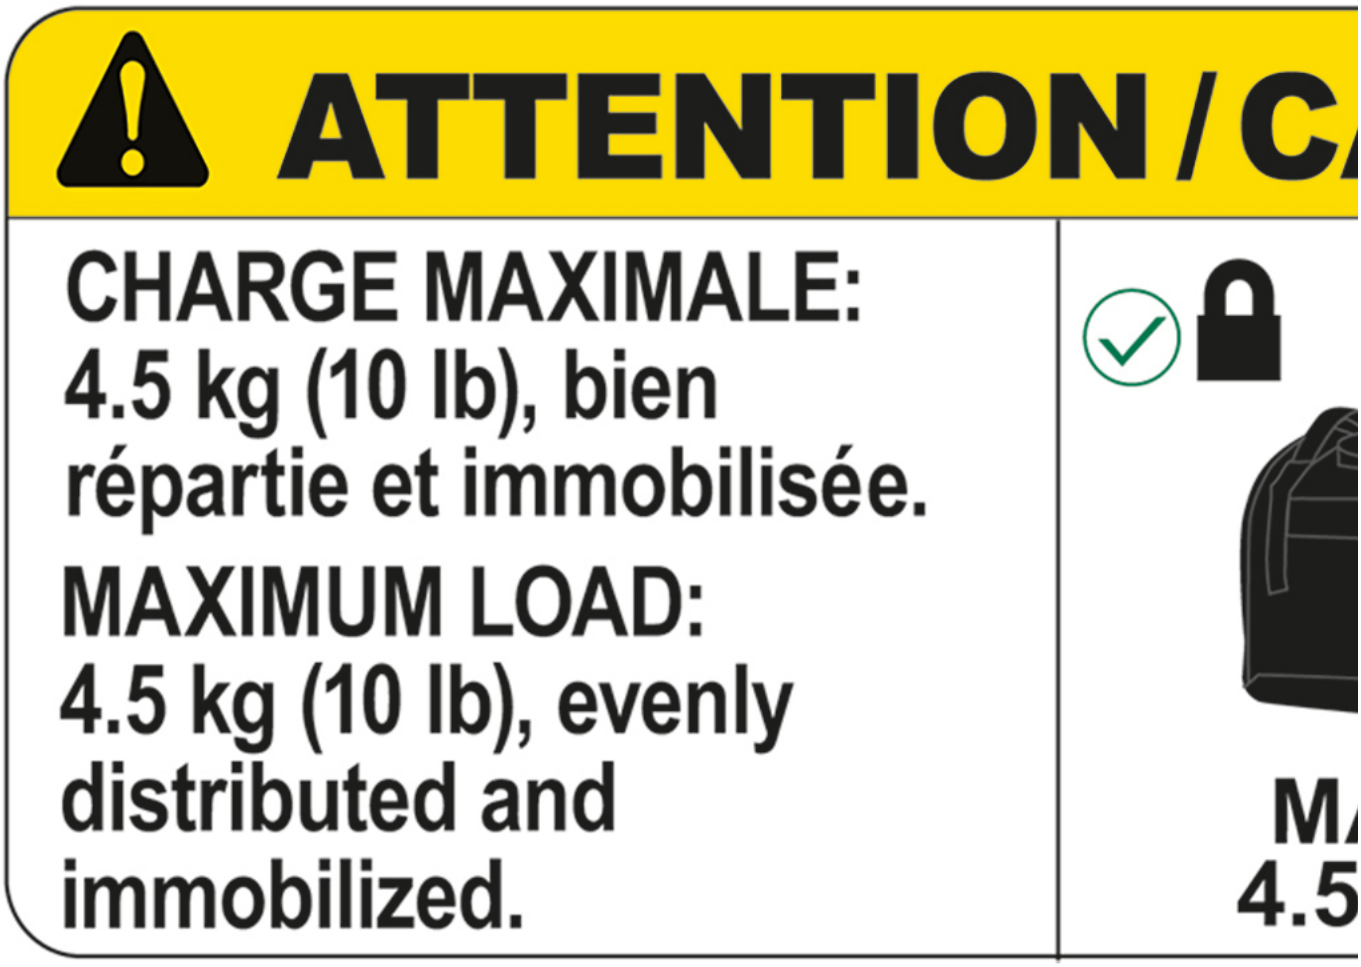

NOTE

Fabric label is sewn inside the LinQ Expandable Bag [P1].


brp.com
BRP
Conçu au Canada
Designed in Canada
ATTENTION / CAUTION