



INSTRUCTION SHEET

Can-Am Off-road

AUGUST 17, 2026
487802911 | VERSION A

LinQ Semi-Rigid Bag

TIME FOR COMPLETION: 0.25 HOUR

The following symbols may be used in this document:

DANGER

Indicates a hazardous situation that, if not avoided, will result in death or serious injury.

WARNING

Indicates a hazardous situation that, if not avoided, could result in death or serious injury.

CAUTION

Indicates a hazardous situation that, if not avoided, could result in minor or moderate injury.

NOTICE

Indicates an instruction which, if not followed, could severely damage vehicle components or other property.

⚠ WARNING

- This kit is designed for specific applicable models only (authorized BRP dealers will confirm model(s)). It is not recommended for units other than the one (those) for which it was sold.
- If the installation of the kit requires a template, ensure template is to scale.
- Should removal of a locking device (e.g. lock tabs, self-locking fasteners, etc.) be required when undergoing disassembly/assembly, always replace with a new one.
- Torque wrench tightening specifications must strictly be adhered to.
- Always wear EYE PROTECTION AND APPROPRIATE GLOVES when using power tools.
- Always be aware of parts that can move, such as wheels, transmission components, etc.
- Some components may be HOT. Always wait for all components to cool down before performing work.
- Unless otherwise specified, engine must be OFF when performing any operation on the vehicle.

⚠ WARNING

Some important safety information and/or operating instructions dedicated to the end user might be included in this instruction sheet. Make sure to give the kit part number as well as the instruction sheet included with this kit to the customer. Verify that the customer has access to all the information required for proper use of the accessory.

✎ NOTE

USE TIGHTENING TORQUES IN THE FOLLOWING TABLE IF NOT OTHERWISE SPECIFIED.

–	GRADE			
–	5.8	8.8	10.9	12.9
M4	1.8 N•m ± 0.2 N•m	2.8 N•m ± 0.2 N•m	3.8 N•m ± 0.2 N•m	4.5 N•m ± 0.5 N•m
	(16 lbf•in ± 2 lbf•in)	(25 lbf•in ± 2 lbf•in)	(34 lbf•in ± 2 lbf•in)	(40 lbf•in ± 4 lbf•in)
M5	3.3 N•m ± 0.2 N•m	5 N•m ± 0.5 N•m	7.8 N•m ± 0.7 N•m	9 N•m ± 1 N•m
	(29 lbf•in ± 2 lbf•in)	(44 lbf•in ± 4 lbf•in)	(69 lbf•in ± 6 lbf•in)	(80 lbf•in ± 9 lbf•in)
M6	7.5 N•m ± 1 N•m	10 N•m ± 2 N•m	12.8 N•m ± 2.2 N•m	16 N•m ± 2 N•m
	(66 lbf•in ± 9 lbf•in)	(89 lbf•in ± 18 lbf•in)	(113 lbf•in ± 19 lbf•in)	(142 lbf•in ± 18 lbf•in)
M8	15.3 N•m ± 1.7 N•m	24.5 N•m ± 3.5 N•m	31 .5 N•m ± 3.5 N•m	40 N•m ± 5 N•m
	(135 lbf•in ± 15 lbf•in)	(18 lbf•ft ± 3 lbf•ft)	(23 lbf•ft ± 3 lbf•ft)	(30 lbf•ft ± 4 lbf•ft)
M10	29 N•m ± 3 N•m	48 N•m ± 6 N•m	61 N•m ± 9 N•m	73 N•m ± 7 N•m




	(21 lbf•ft ± 2 lbf•ft)	(35 lbf•ft ± 4 lbf•ft)	(45 lbf•ft ± 7 lbf•ft)	(54 lbf•ft ± 5 lbf•ft)
M12	52 N•m ± 6 N•m	85 N•m ± 10 N•m	105 N•m ± 15 N•m	128 N•m ± 17 N•m
	(38 lbf•ft ± 4 lbf•ft)	(63 lbf•ft ± 7 lbf•ft)	(77 lbf•ft ± 11 lbf•ft)	(94 lbf•ft ± 13 lbf•ft)
M14	85 N•m ± 10 N•m	135 N•m ± 15 N•m	170 N•m ± 20 N•m	200 N•m ± 25 N•m
	(63 lbf•ft ± 7 lbf•ft)	(100 lbf•ft ± 11 lbf•ft)	(125 lbf•ft ± 15 lbf•ft)	(148 lbf•ft ± 18 lbf•ft)
M16	126 N•m ± 14 N•m	205 N•m ± 25 N•m	255 N•m ± 30 N•m	305 N•m ± 35 N•m
	(93 lbf•ft ± 10 lbf•ft)	(151 lbf•ft ± 18 lbf•ft)	(188 lbf•ft ± 22 lbf•ft)	(225 lbf•ft ± 26 lbf•ft)
M18	170 N•m ± 20 N•m	273 N•m ± 32 N•m	330 N•m ± 25 N•m	413 N•m ± 47 N•m
	(125 lbf•ft ± 15 lbf•ft)	(201 lbf•ft ± 24 lbf•ft)	(243 lbf•ft ± 18 lbf•ft)	(305 lbf•ft ± 35 lbf•ft)

 NOTE

The illustrations in this document show typical construction of the different assemblies and may not reproduce the full detail or exact shape of the parts; however, they represent parts that have the same or similar function. In the pictures below, parts may have been removed for clarity purposes.



PARTS TO BE INSTALLED

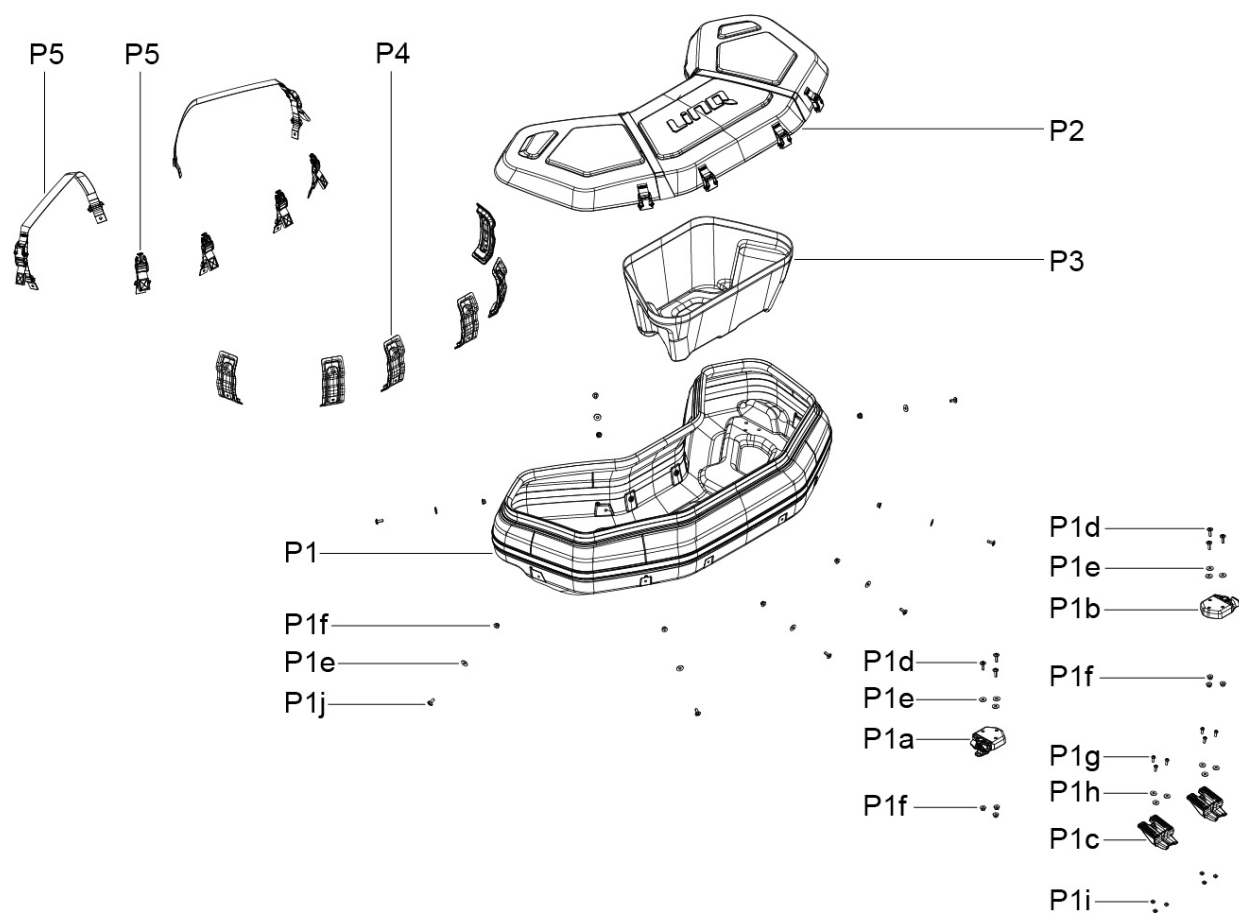


ITEM	DESCRIPTION	PART NUMBER	QTY
P1	Storage Bag Assembly	Not Available Separately	1
P1a	LH LinQ Low Profile Fastener	511001826	1
P1b	RH LinQ Low Profile Fastener	511001827	1
P1c	Retaining Hook	715011062	2
P1d	M6 X 20 Torx Screw	250000722	6
P1e	M6 Flat Washer	234062670	14
P1f	M6 Flanged Nut	233161464	14
P1g	M5 X 16 Torx Screw	250000578	6
P1h	M5 Flat Washer	250200025	10
P1i	M5 Square Nut	232852411	6



ITEM	DESCRIPTION	PART NUMBER	QTY
P1j	M6 X 16 Torx Screw	250000717	8
P2	Cover Assembly	Not Available Separately	1
P3	Storage Compartment Assembly	708201536	1
P4	Molded Reinforcement	Not Available Separately	1
P5	Strap Service Kit	715011364	1

SERVICE PARTS

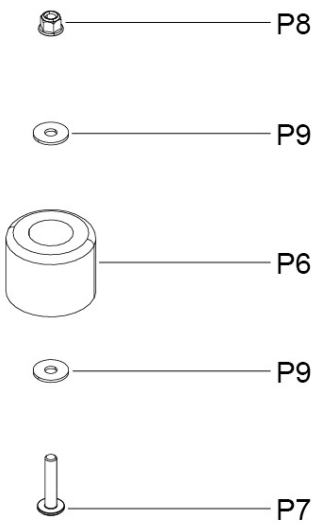

715008895 KIT

ITEM	DESCRIPTION	PART NUMBER	QTY
P6	Rubber Stopper	708304343	4
P7	M5 X 25 Torx Screw	250000762	4
P8	M5 Flanged Elastic Nut	233251494	4
P9	M5 Flat Washer	234052670	8


INSTALLATION INSTRUCTIONS

NOTE

The installation instructions on the G3L models are shown. The instructions are the same for the G3 models.




1. Position the LinQ bag on the rack so that the retaining hooks [P1c] are placed as shown.

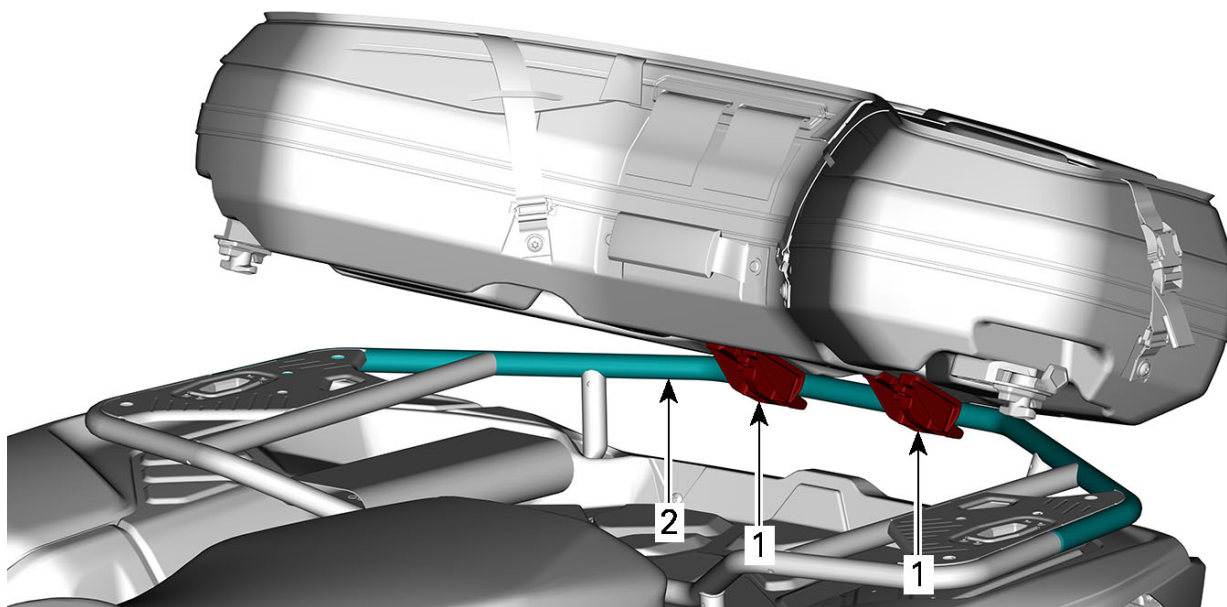

1. Retaining Hook [P1c]

2. Rack


2. Insert the LinQ fastener [P1a] and [P1b] into the vehicle's LinQ supports.

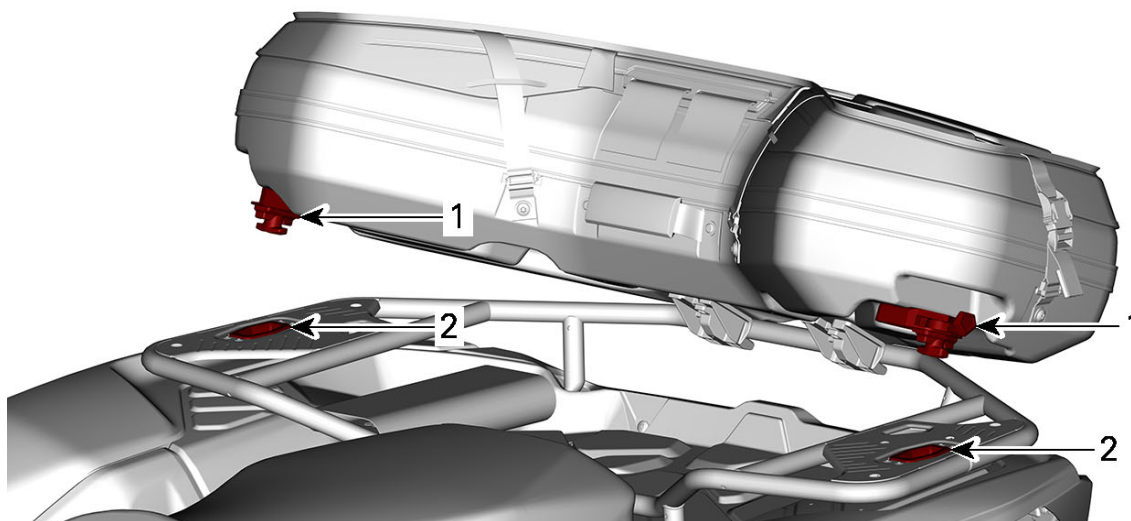

1. LinQ Fastener [P1a] and [P1b]

2. LinQ Support

3. Lock the bag in place with the LinQ fastener's lever on both sides of the vehicle.

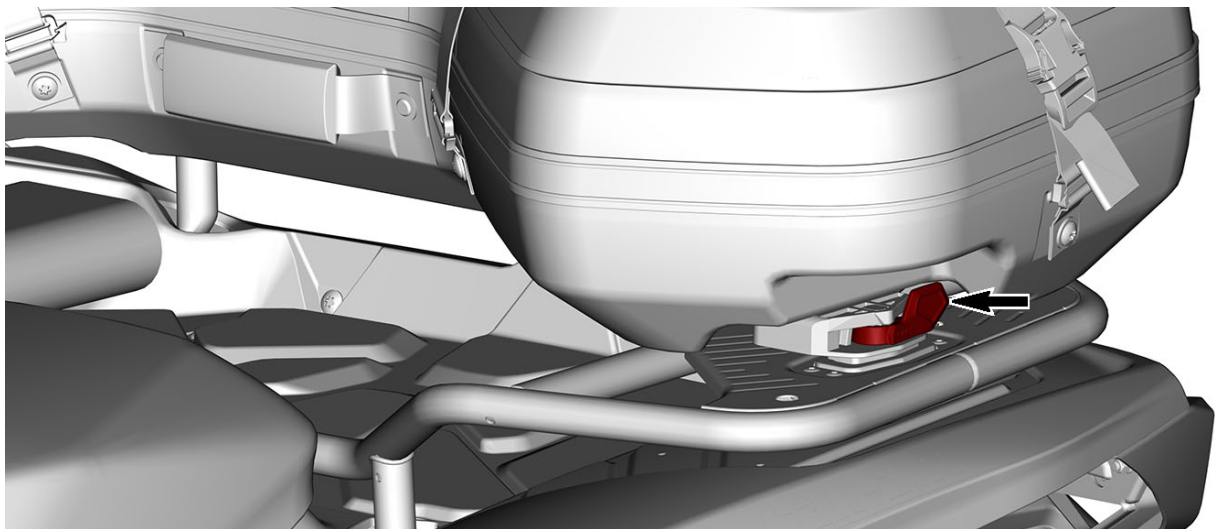

PARTS PREPARATION FOR 36" ELEVATED ANCHORS


NOTE

For installation on SSV and on 6X6 ATV, the Rubber Stopper Kit 715008895 is required.

1. Make sure that the LinQ anchorages are placed as shown.

NOTE

If the SSV does not already have the LinQ anchorages installed, use two 860203055 kits and install them on the vehicle.

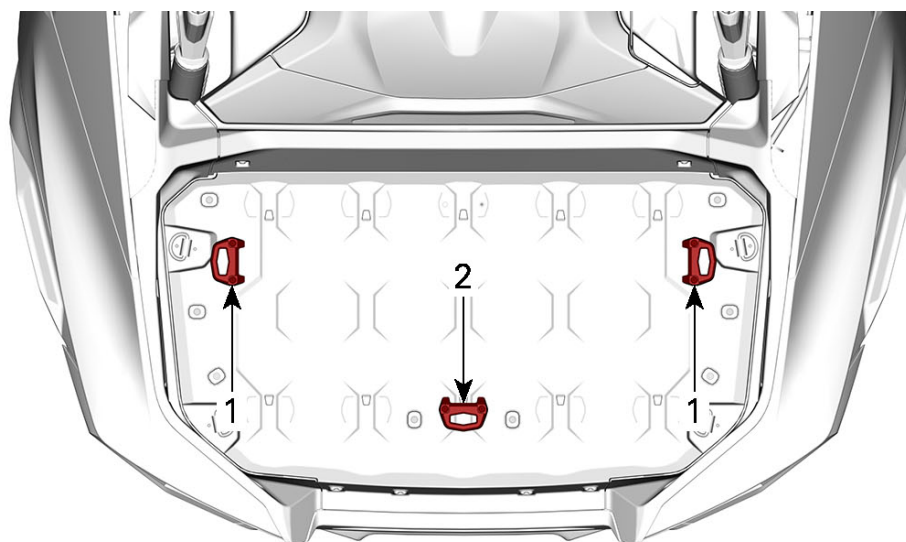


SSV

1. *Lateral LinQ Anchorage*
2. *Central LinQ Anchorage*

NOTE


If the 6X6 ATV does not already have the LinQ anchorages installed, use two 715009123 kits and install them on the vehicle.

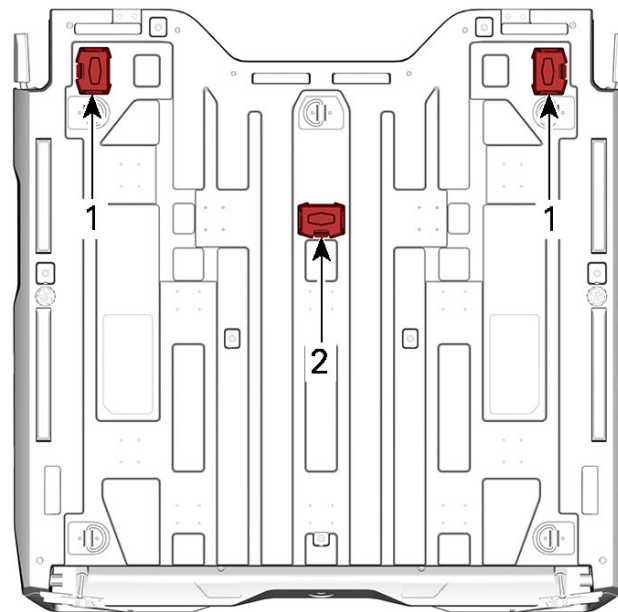


6X6 ATV

1. *Lateral LinQ Anchorage*
2. *Central LinQ Anchorage*

2. Locate the 7 drilling locations shown in the image below. Drill the holes with a 6 mm (1/4 in) drill bit.

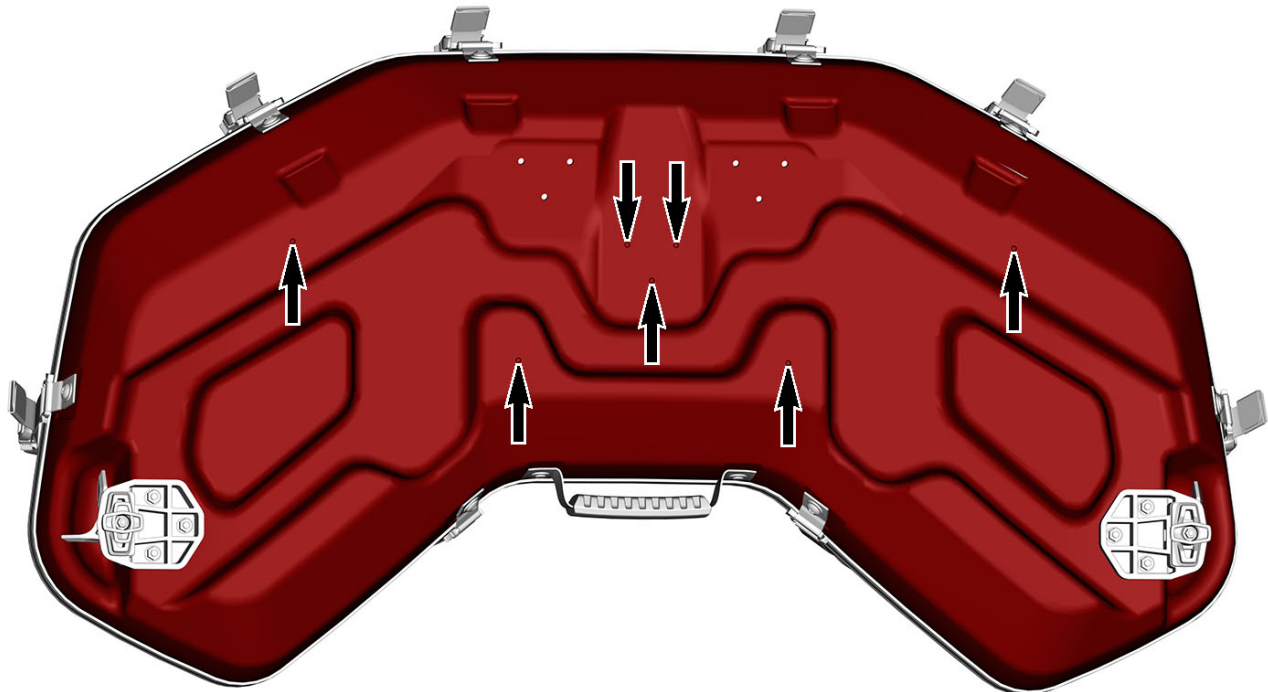

3. Install the Rubber Stopper Kit 715008895 and a retaining hook [P1c] under the bag as shown.

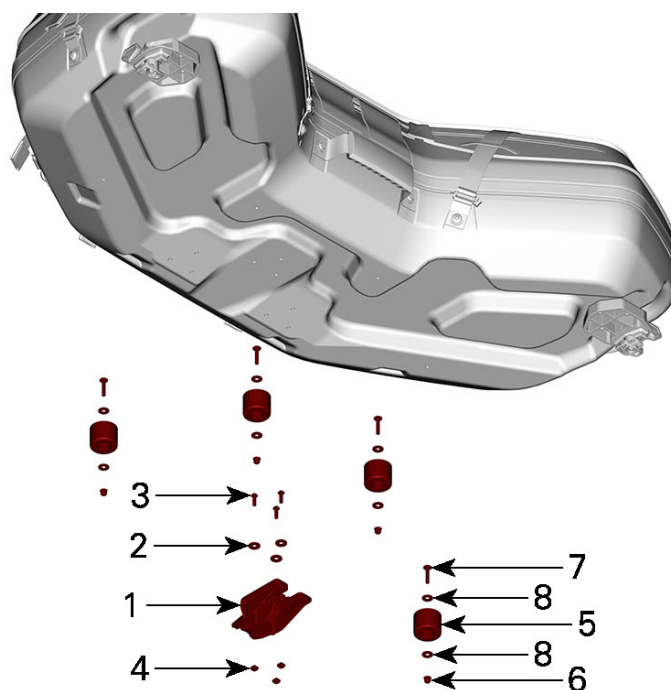

1. Retaining Hook [P1c]

2. M5 Flat Washer [P1h]

3. M5 X 16 Torx Screw [P1g]

4. M5 Square Nut [P1i]

5. Rubber Stopper [P6]

6. M5 Flanged Elastic Nut [P8]


7. M5 X 25 Torx Screw [P7]

8. M5 Flat Washer [P9]

4. Install the bag on the vehicle by sliding the retaining hook [P1c] into the central LinQ anchorage and then put the LinQ fasteners [P1a] and [P1b] into the lateral LinQ anchorages. Lock the bag in place with the LinQ fastener's lever on both sides of the vehicle.

NOTE

Only the installation on the SSV is shown. The installation is the same on the 6X6 ATV.

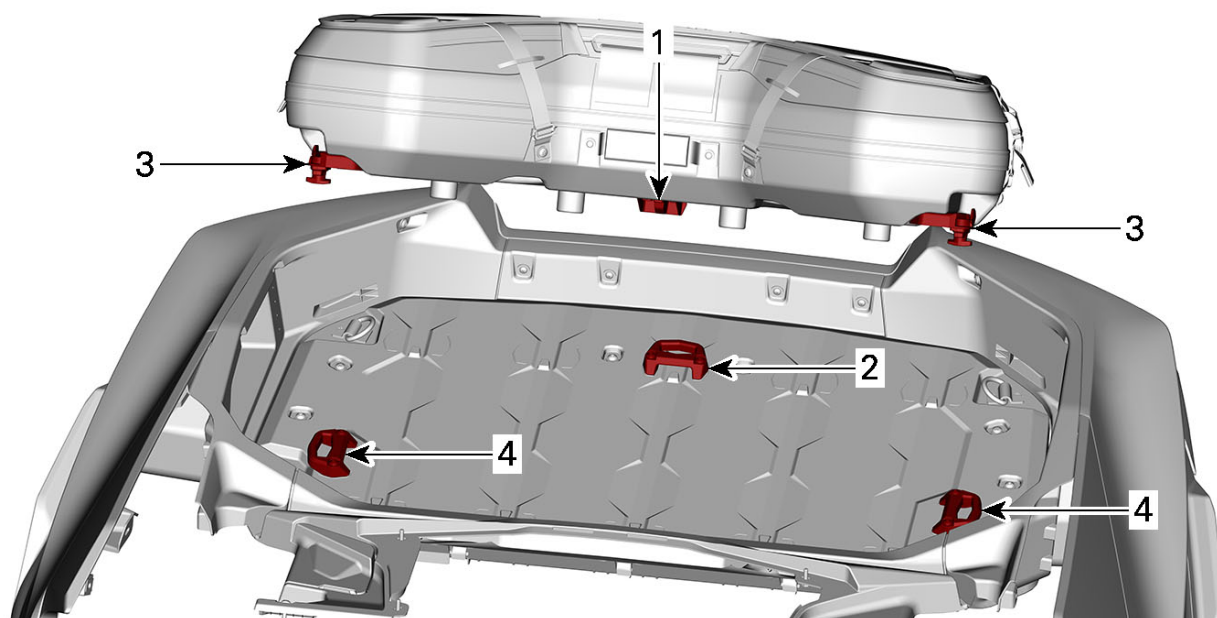

1. Retaining Hook [P1c]
2. Central LinQ Anchorage
3. LinQ Fastener [P1a] and [P1b]
4. Lateral LinQ Anchorage

CARE and MAINTENANCE

- Completely read and understand the instructions before installing this accessory.
- To clean, sponge with mild soap and cold water, rinse with a hose and allow it to drip-dry.
- Use mild detergent to remove stubborn stains.
- Wash by hand.
- Do not bleach.
- Do not tumble dry.
- Do not iron.
- Do not dry clean.
- Flat drying.
- Do not power wash.

SAFETY LABEL

This product comes with the following safety information.

The labels are considered a permanent part of this product. If the labels come off or become hard to read, please contact an authorized dealer for a free of charge replacement.

Any person who intends to use this product should read and understand the information contained on the labels before doing so.

**⚠ WARNING**


Failure to observe these instructions could lead to severe injury or death.

- NEVER carry gasoline, flammable or dangerous liquids in cargo bag. If ignited, this can lead to an explosion and cause severe injury or death.
- This cargo bag can be loaded with 6.8 kg (15 lb) maximum.
- Maximum weight capacity combined with gasoline notice.
- NEVER carry a load on lid.


⚠ WARNING

- Never carry gasoline, flammable or dangerous liquids in cargo bag. If ignited, this can lead to an explosion and cause severe injury or death.
- This cargo bag can be loaded with 6.8 kg (15 lb) maximum.
- Maximum weight capacity combined with gasoline notice.
- Never carry a load on lid.

911637

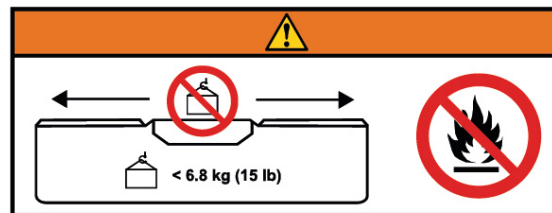

WARNING LABEL (704911637)

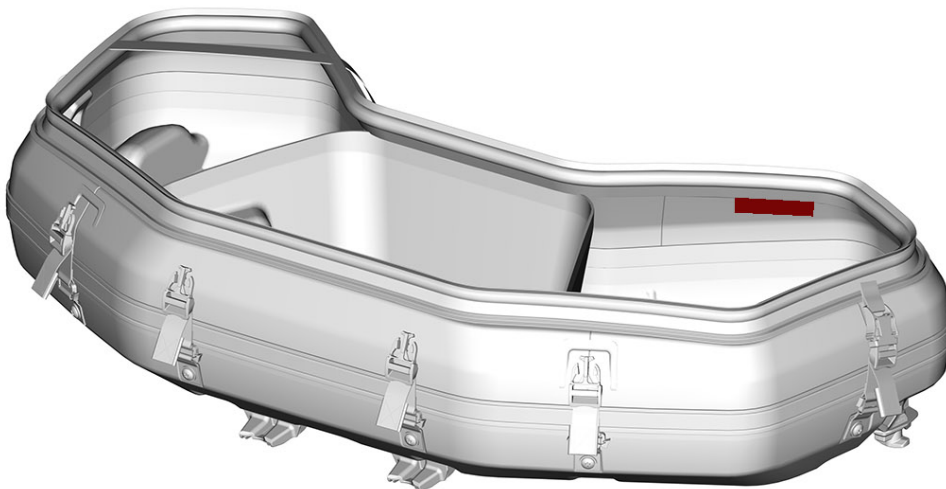

WARNING LABEL LOCATION